

Texfel®



HEAD OFFICE

c/ Orient, 78-84
2ª Planta Oficina 16-17
08172 Sant Cugat del Vallès
Barcelona (Spain)

+34 935 878 784

FACTORY

c/Fonoll, 1
Poligon Industrial d'Olius
25286 Olius
Lleida (Spain)

+34 973 484 060

www.fytisa.com

 hello@texfel.com

 www.texfel.com

 [texfel_designfelt](https://www.instagram.com/texfel_designfelt)

We make felt for
architects, designers and
textile lovers

Texfel® Interiors

Our range of flame-retardant design felts with a velour finish and high abrasion resistance.

Texfel® Interiors 200

Weight


200 gr/m²

Thickness

1,75 mm

25 lm (length)

200 cm (width)

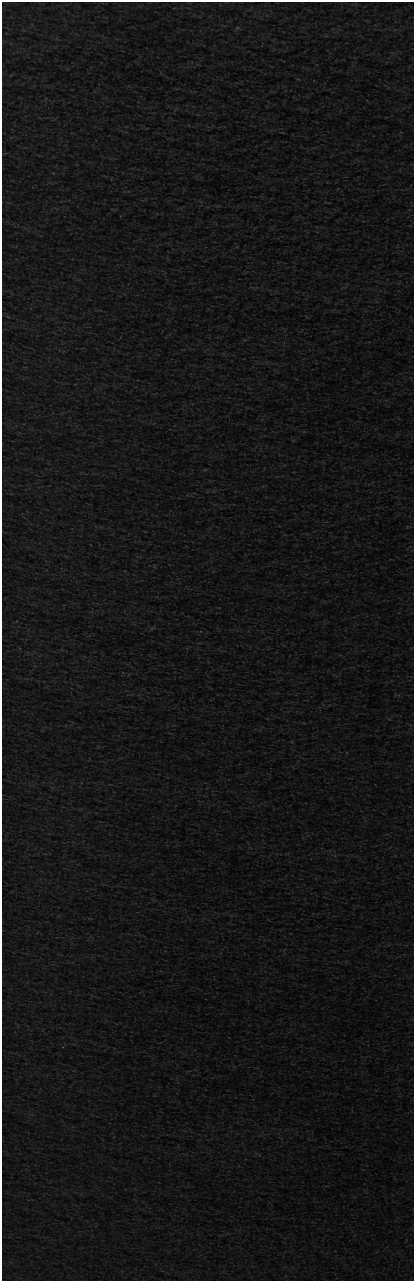

Texfel® Interiors 500

Weight

500 gr/m²

Thickness

3 mm

20 lm (length)

200 cm (width)



Texfel® Interiors 800

Weight


800 gr/m²

Thickness

5 mm

15 lm (length)

200 cm (width)

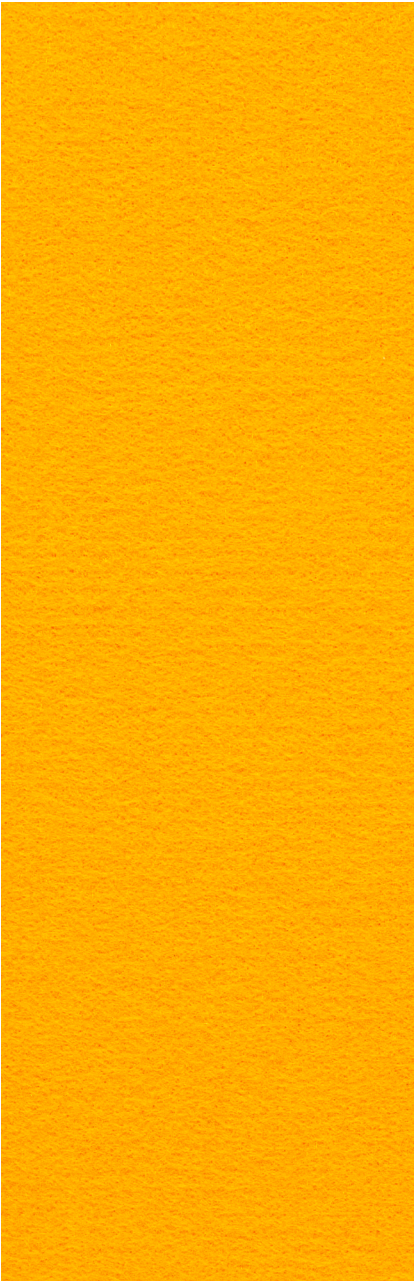

Recyclable
100% Polyester

Flame Retardancy
EN 13501-1+A1: B-s1, d0
ASTM E-84-18: Class A

Sound Absorption
UNE-EN ISO 354: αW = 0,15 (H)
EN ISO 11654: Class E

Colour fastness to light
EN ISO 105-B02: 5-7

Abrasion Resistance
UNE-EN 14465+A1: Class A
ISO 12947-2 / AC: > 50.000 Rubs

Colours & Thicknesses
Solid and melange colours
3 thicknesses: 1,75 mm - 3 mm - 5 mm



Colours

SOLID

400	401	494	499
450	456	446	447
448	432	424	426
438	409	478	

MELANGE

400ML	401ML	494ML	496ML
450ML	446ML	432ML	424ML
423ML	426ML	438ML	409ML
408ML			

Possible slight colour differences between dye batches or colour card editions | Please ask for other colour options