

TECHNICAL SPECIFICATIONS



Dimensions: 50 - 52/54 - 55 cm cm seat centres
40 cm depth
86.5 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m³

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.


Side panel: Texturized injected polypropylene, reinforced with glass fibre. Concealed floor fixation system. Optional; Upholstered end row panel or by LYF system.

Armrest: Included in the very side panel.


Volume: 0.08 m³/unit

Weight: 10 Kg not assembled

DRAWING

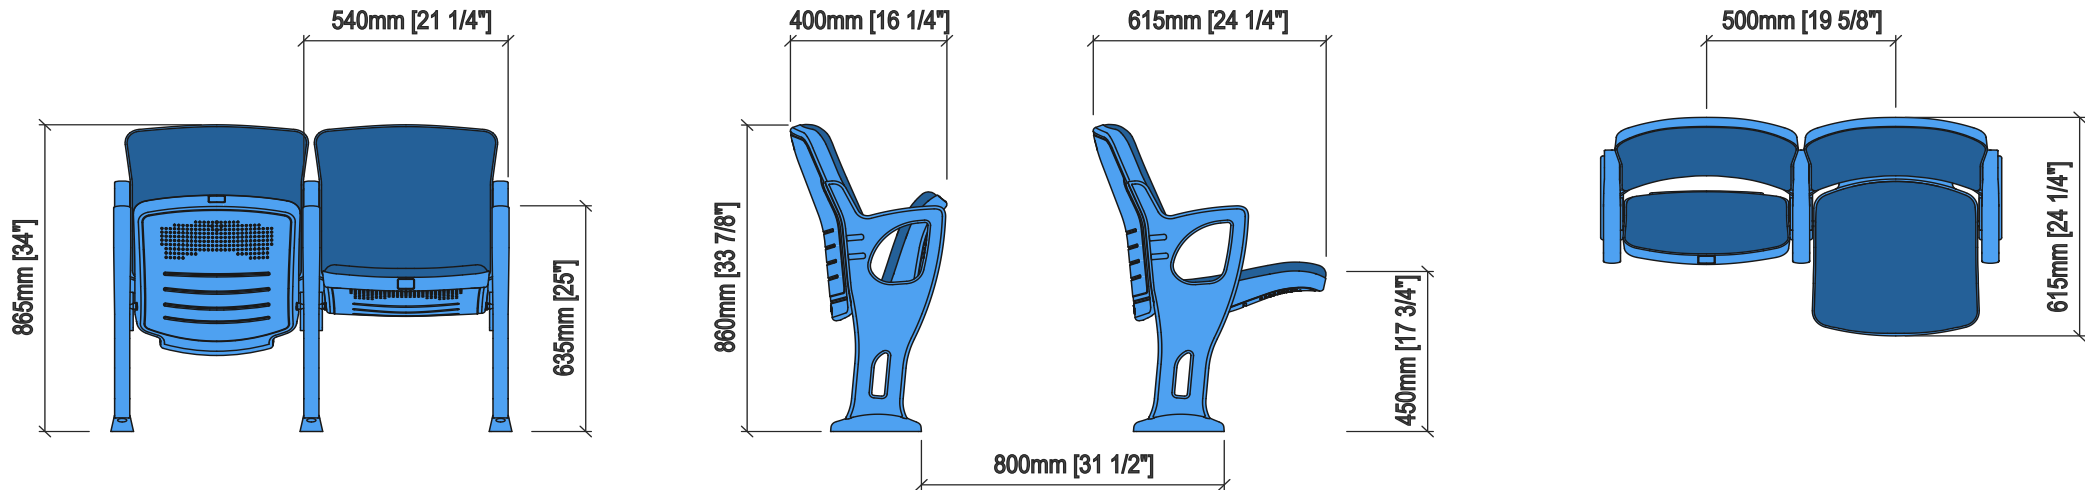

OPTIONS

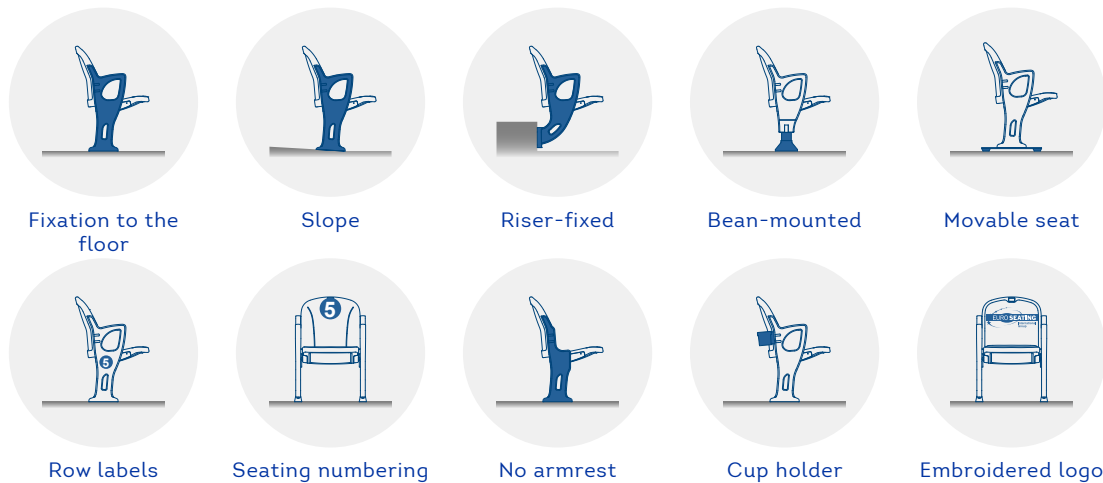

CERTIFICATES

BS 5852:2006
 BS-EN 1021-1:2006
 CAL TB 117-2013, SECTION 1
 UNE 23.727-90 1R (M1)
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
 BS 5852:1979 Parte 1
 UNE 23.727-90 1R (M2 / M3) Opcional
 UNE EN 12727:01 Uso Público Severo (Nivel 4)

	Fabric	Fire barrier	Foam	Plastic	Seat
BS 5852:2006	•				
BS-EN 1021-1:2006	•				
CAL TB 117-2013, SECTION 1	•				
UNE 23.727-90 1R (M1)	•	•			
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•		
BS 5852:1979 Parte 1		•			
UNE 23.727-90 1R (M2 / M3) Opcional				•	
UNE EN 12727:01 Uso Público Severo (Nivel 4)					•



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.